


A BETTER WAY TO TRIP TEST




DRYTEST

The AGF **DRYTEST** Model 5600 combines the test connection valve and the orifice manifold used to perform the trip test on dry and pre-action fire sprinkler systems into a single, compact valve. It allows the Inspector to test the system at the valve, reduces the amount of system connections, and cuts down on installation time. It features a brass insert with the system's specified orifice size (5.6, 5.6 x 2, 8.0, and 8.0 x 2) and a sight glass for water flow validation.

Old Way

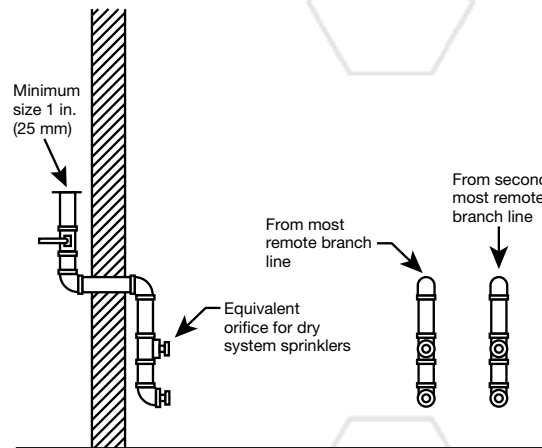

DRYTEST

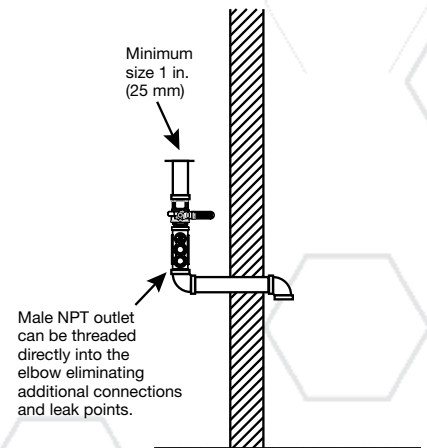

www.agfmfg.com